



ENORM Anschlagpunkt >Flat Point< 1,5
M 16 x 200 mm (g = 172 mm) WLL 1,5 t

27.03.2023

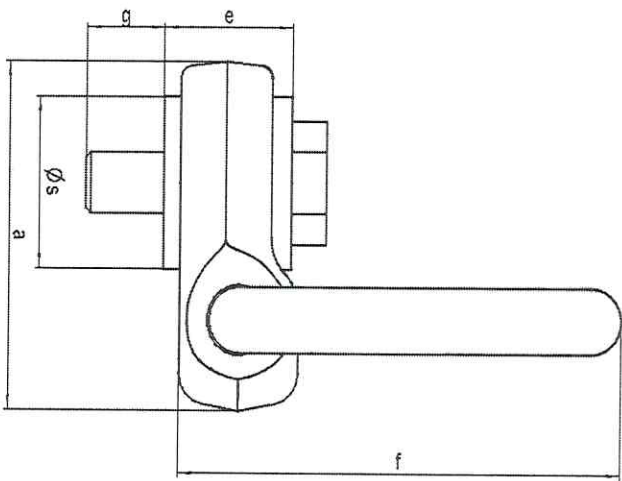

a	69 mm
b	50 mm
c	48 mm
∅d	13 mm
e	28 mm
f	100 mm
g	172 mm
l	49 mm
∅s	34 mm

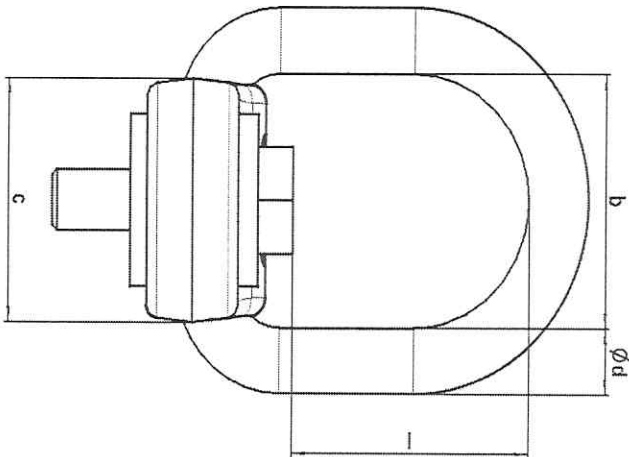



Anschlagart						
Stück	1	1	2	2	2	3 o 4
Neigungswinkel	0°	90°	0°	90°	0°-45°	0°-45°
Tragfähigkeit in t	1,50	2,12	3,00	4,00	2,00	3,15
						2,24

ENORM Anschlagpunkt >Flat Point< 2,5
M 20 x 200 mm (g = 167 mm) WLL 2,5 t

27.03.2023



a	69 mm
b	50 mm
c	48 mm
Ød	13 mm
e	33 mm
f	103 mm
g	167 mm
l	44 mm
Øs	41 mm

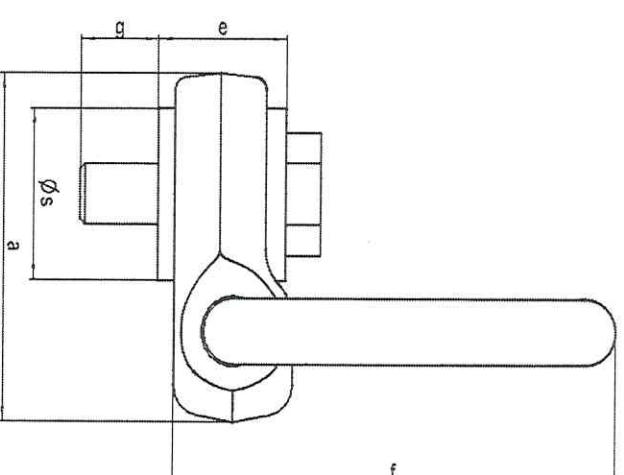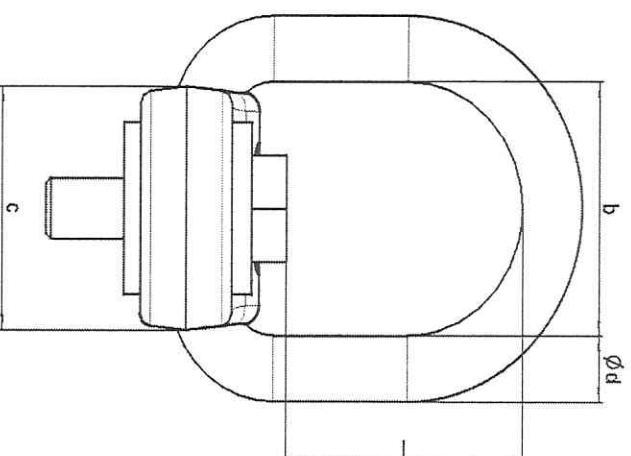



Anschlagart							
Stück	1	1	2	2	2	3 o. 4	
Neigungswinkel	0°	90°	0°	90°	0°-45°	45°-60°	0°-45°
Tragfähigkeit in t	2,50	3,55	5,00	7,10	3,35	2,50	5,00

ENORM Anschlagpunkt >Flat Point< 4-S
M 24 x 300 mm (g = 266 mm) WLL 4 t

27.03.2023



a	69 mm
b	50 mm
c	48 mm
Ød	13 mm
e	34 mm
f	103 mm
g	266 mm
l	40 mm
Øs	41 mm

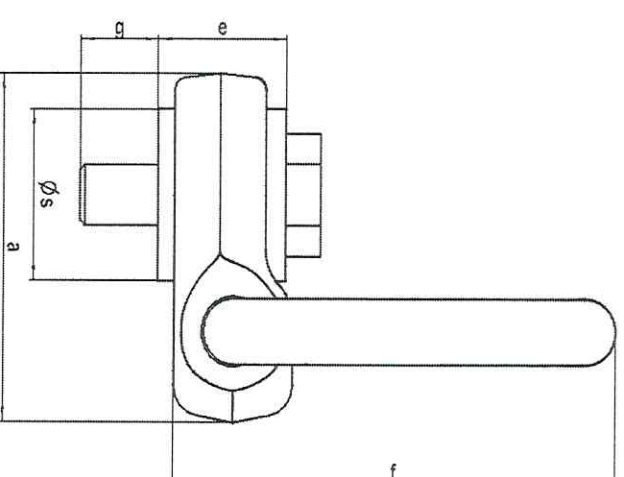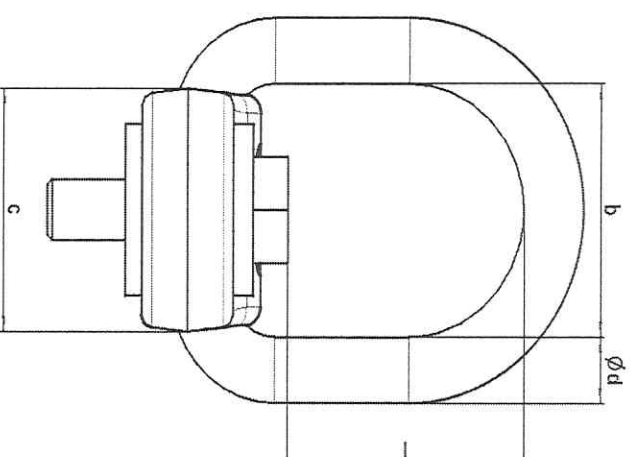



Anschlagart								
Stück	1	1	2	2	2	2	3 o. 4	3 o. 4
Neigungswinkel	0°	90°	0°	90°	0° - 45°	45° - 60°	0° - 45°	45° - 60°
Tragfähigkeit in t	4,00	4,00	8,00	8,00	5,60	4,00	8,00	6,00

ENORM Anschlagpunkt >Flat Point< 4
M 24 x 300 mm (g = 261 mm) WLL 4 t

27.03.2023



a	104 mm
b	76 mm
c	72 mm
Ød	18 mm
e	39 mm
f	147 mm
g	261 mm
l	79 mm
Ø s	58 mm

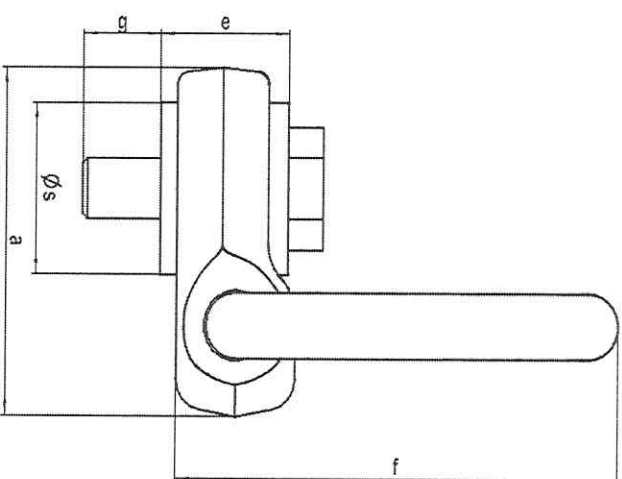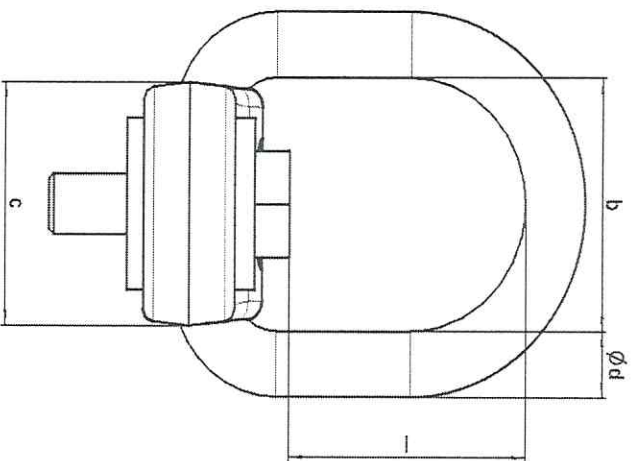



Anschlagart						
Stück	1	1	2	2	2	3 o. 4
Neigungswinkel	0°	90°	0°	90°	0° - 45°	0° - 45°
Tragfähigkeit in t	4,00	5,60	8,00	11,20	5,60	8,00
					4,00	6,00

ENORM Anschlagpunkt >Flat Point< 5
M 27 x 300 mm (g = 261 mm) WLL 5,3 t

27.03.2023



a	104 mm
b	76 mm
c	72 mm
∅d	18 mm
e	39 mm
f	147 mm
g	261 mm
l	72 mm
∅ s	58 mm

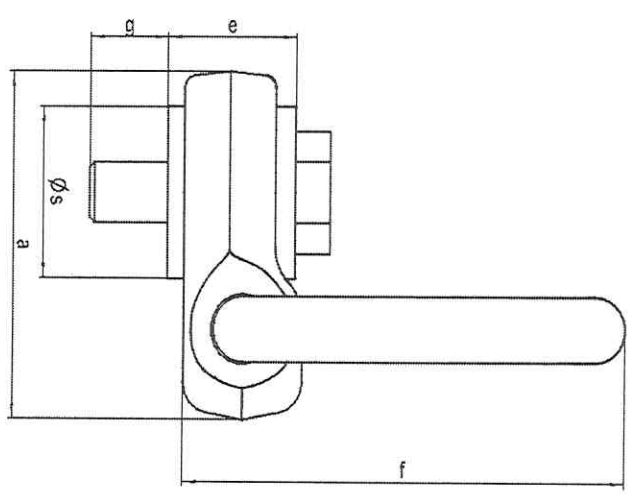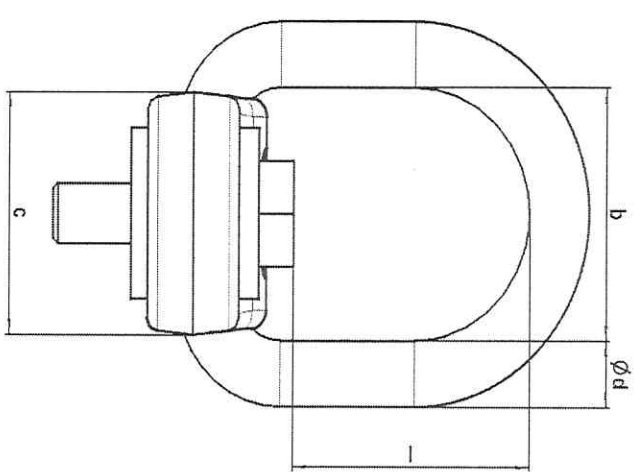



Anschlagart					
Stück	1	1	2	2	3 o. 4
Neigungswinkel	0°	90°	0°	90°	0° - 45° 45° - 60°
Tragfähigkeit in t	5,30	7,10	10,60	14,00	7,10 5,30 11,20 8,00

ENORM Anschlagpunkt >Flat Point< 6
M 30 x 300 mm (g = 261 mm) WLL 6 t

27.03.2023




a	104 mm
b	76 mm
c	72 mm
Ød	18 mm
e	39 mm
f	147 mm
g	261 mm
l	70 mm
Ø s	58 mm

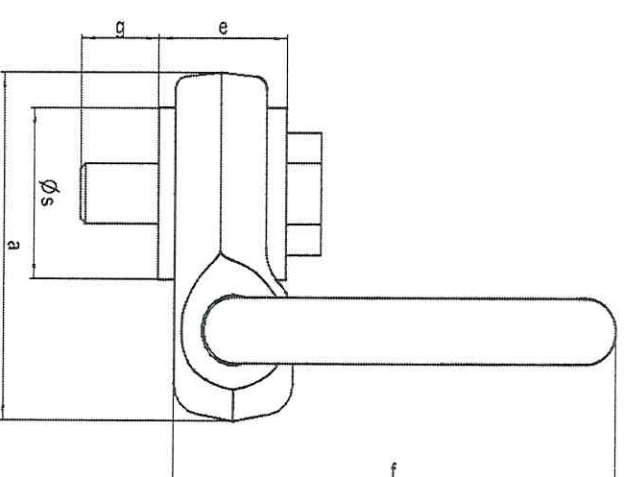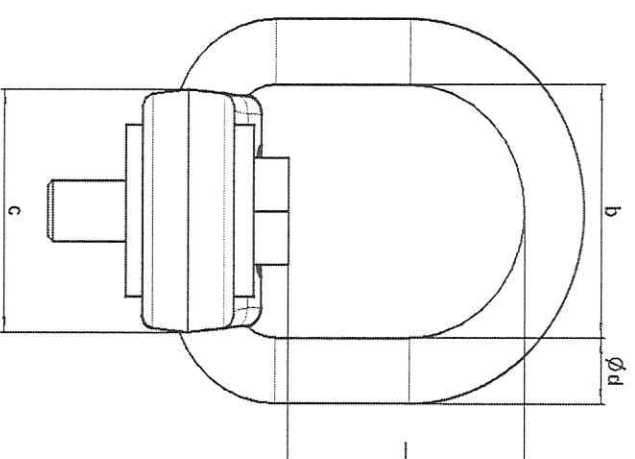



Anschlagart					
Stück	1	1	2	2	3 o. 4
Neigungswinkel	0°	90°	0°	90°	0° - 45° 45° - 60°
Tragfähigkeit in t	6,00	8,00	12,00	16,00	8,00 6,00 12,50 9,00

ENORM Anschlagpunkt >Flat Point< 8
M 36 x 300 mm (g = 257 mm) WLL 8 t

27.03.2023



a	104 mm
b	76 mm
c	72 mm
Ød	18 mm
e	43 mm
f	147 mm
g	257 mm
l	62 mm
Ø s	58 mm

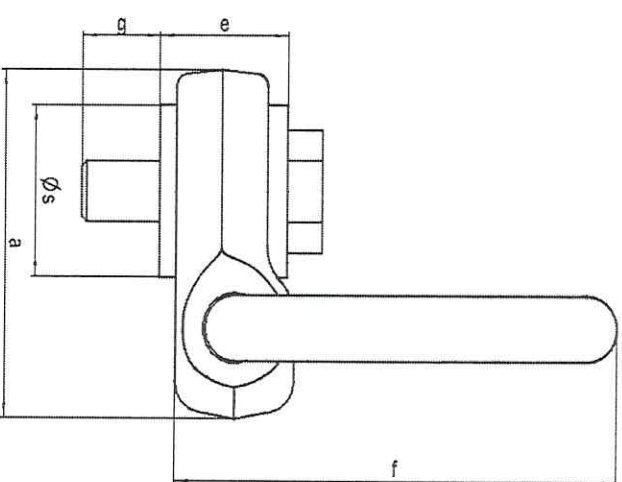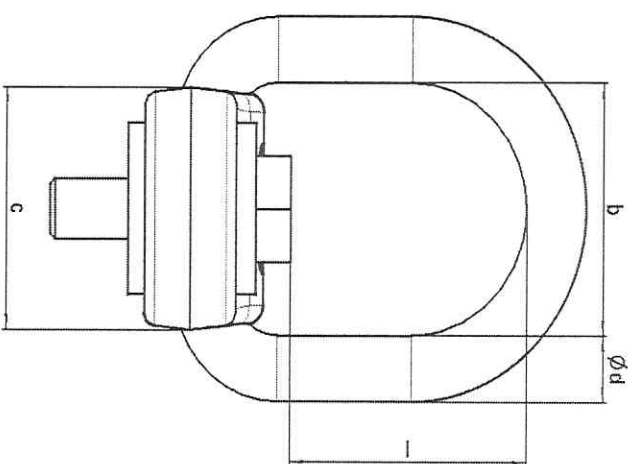



Anschlagart						
Stück	1	1	2	2	2	3 o. 4
Neigungswinkel	0°	90°	0°	90°	0°-45°	0°-45°
Tragfähigkeit in t	8,00	8,00	16,00	16,00	11,20	12,00

ENORM Anschlagpunkt >Flat Point< 10
M 42 x 300 mm (g = 234,5 mm) WLL 10 t

27.03.2023



a	160 mm
b	107 mm
c	99 mm
Ød	34,5 mm
e	65,5 mm
f	236 mm
g	234,5 mm
l	110 mm
Ø s	90 mm

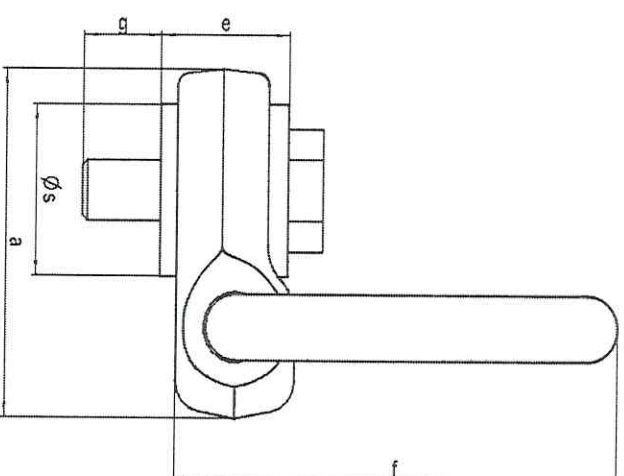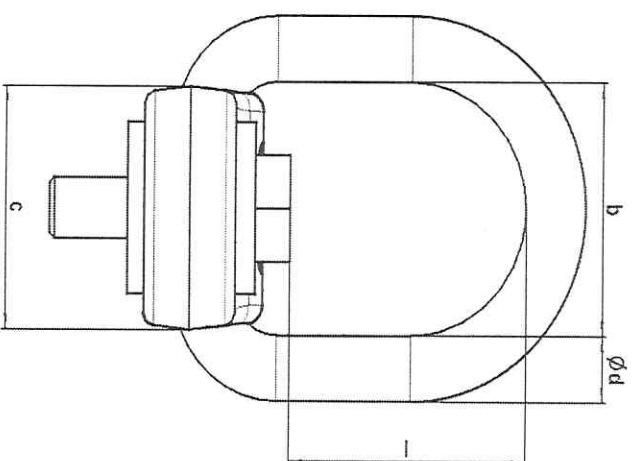

Anschlagart						
Stück	1	1	2	2	2	3 o. 4
Neigungswinkel	0°	90°	0°	90°	0°-45°	0°-45°
Tragfähigkeit in t	10,00	15,00	20,00	30,00	14,00	21,20

45°-60°



15,00

ENORM Anschlagpunkt >Flat Point< 15
M 48 x 300 mm (g = 234,5 mm) WLL 15 t

27.03.2023



a	160 mm
b	107 mm
c	99 mm
Ød	34,5 mm
e	65,5 mm
f	236 mm
g	234,5 mm
l	106 mm
Ø s	90 mm

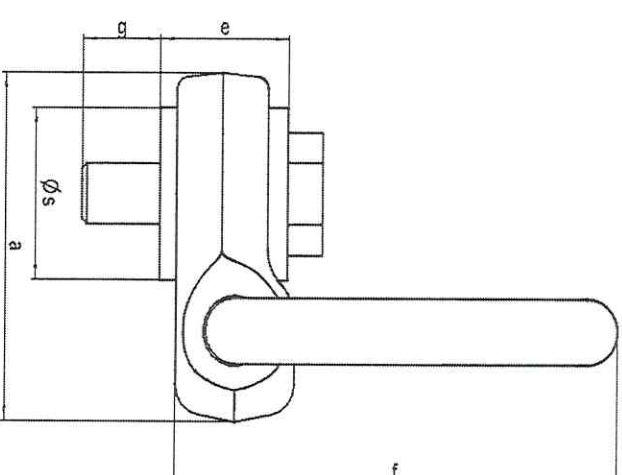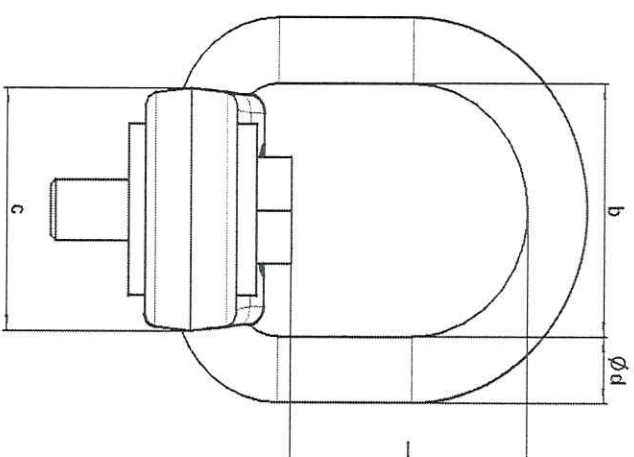

Anschlagart						
Stück	1	1	2	2	2	3 o. 4
Neigungswinkel	0°	90°	0°	90°	0°-45°	0°-45°
Tragfähigkeit in t	15,00	20,00	30,00	40,00	21,20	31,50
					15,00	22,40